

preScreen™ P Pressure Strainer

Self Cleaning Pre-Membrane Screen


- Perforated screen: 0.5mm, 1mm, or 2mm
- HDPE welded body
- Spring-loaded brush assembly
- 304 stainless steel screen and internals
- Pressure sensor
- 0.25 hp, 3-phase gear/motor
- 24VDC actuated blow-down valve



Operating Parameters

- Pressure 0 - 20 psi
- Flow 0 - 100 gpm (with 1mm perf)
- Temperature 40 - 100° F

Self Cleaning Screen Features

- Removes fine debris
- Replaceable mechanical seal
- Replaceable brush inserts

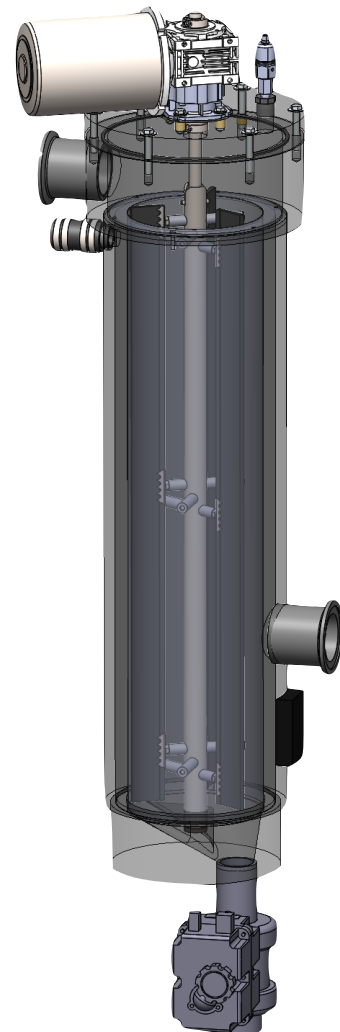

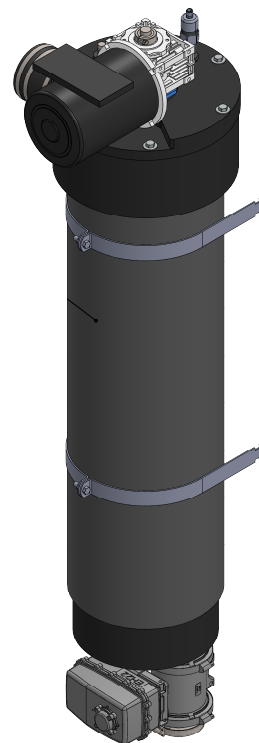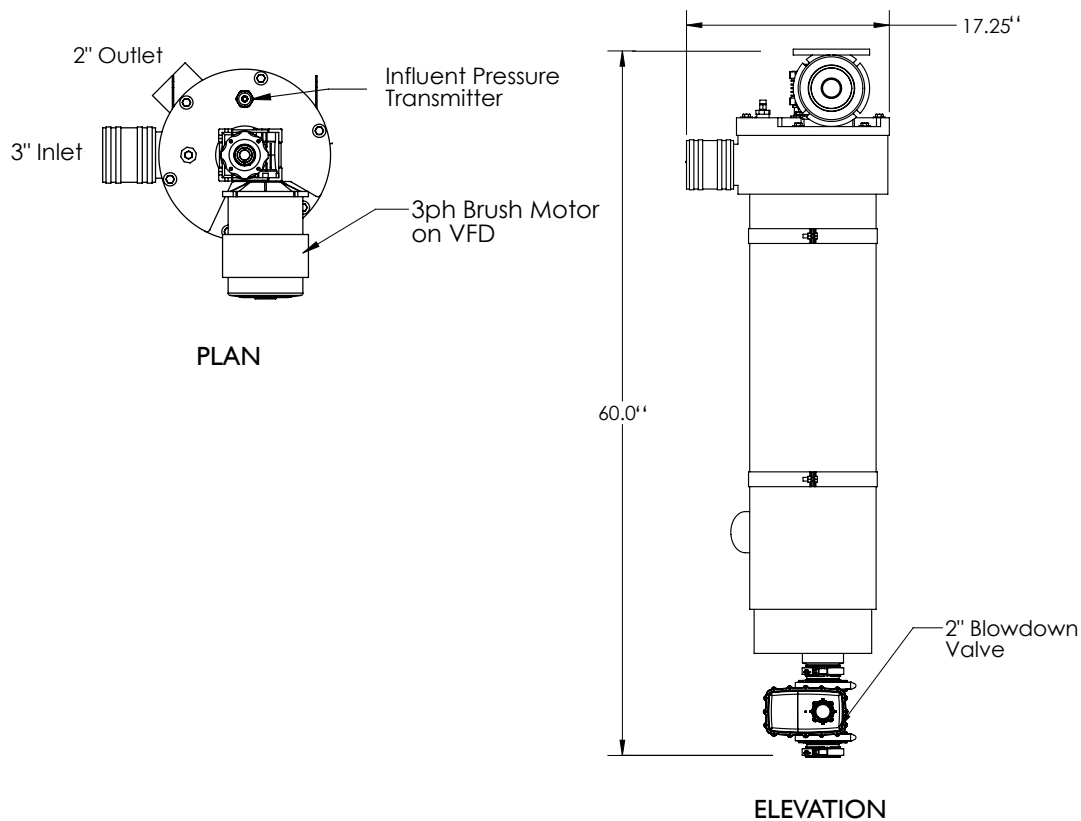

Sales

P: 800-881-5184
E: sales@innovatreat.com

Parts & Service

P: 800-881-5184
E: service@innovatreat.com

General Inquiries

P: 800-881-5184
E: info@innovatreat.com

Innovative Treatment Products, Inc.
11 Easter Court, Suite L
Owings Mills, MD 21117

www.innovatreat.com



INNOVATREAT™