



Internally-Fed Rotary Drum Screen

- Perforated screen openings: 1-6 mm
- Available in 304 or 316 stainless steel
- Integral spray bar assembly
- Cantilevered drum (no trunnions)
- Direct drum drive (no belts or chains)
- Direct compactor drive (optional)



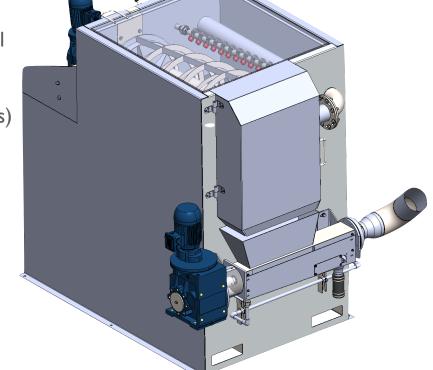

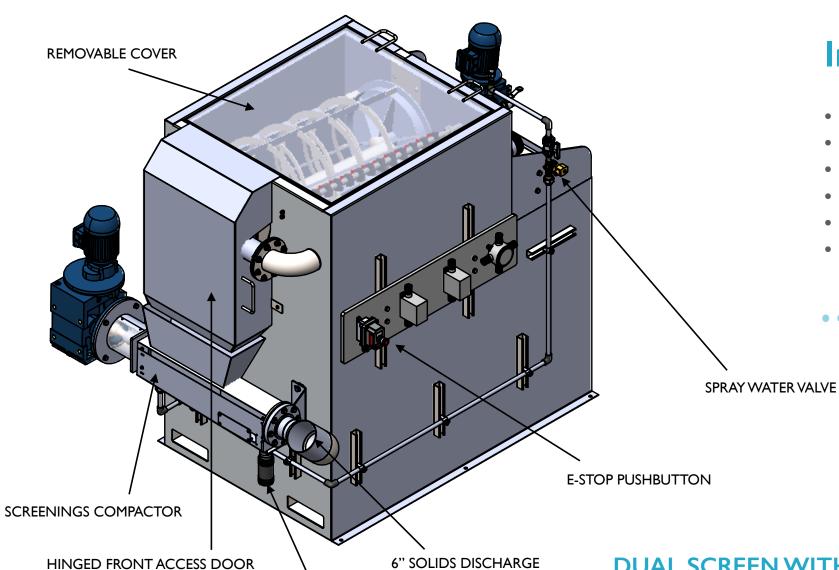


2" COMPACTOR DRAIN

Internally-Fed Rotary Drum Screen Features

- Clear water flow rates: 50 650 gpm (depending on screen opening)
- Explosion-proof motors and components available
- Spray water requirements: Screen -15 gpm, Compactor 2 gpm @ 60-80 psi
- Quarter-turn replaceable spray nozzles
- Drum screen drive gear/motor: I.0 hp, 230/460 VAC 3 phase
- Optional screenings compactor with gear/motor: 2.0 hp, 230/460 VAC 3 phase


DUAL SCREEN WITH COMPACTOR



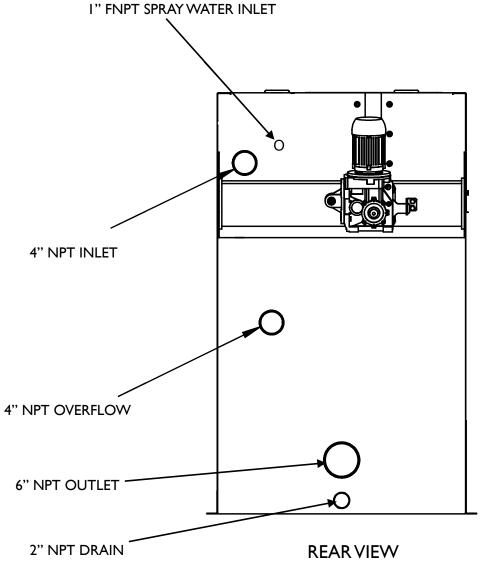

preScreen[™] **RDS**



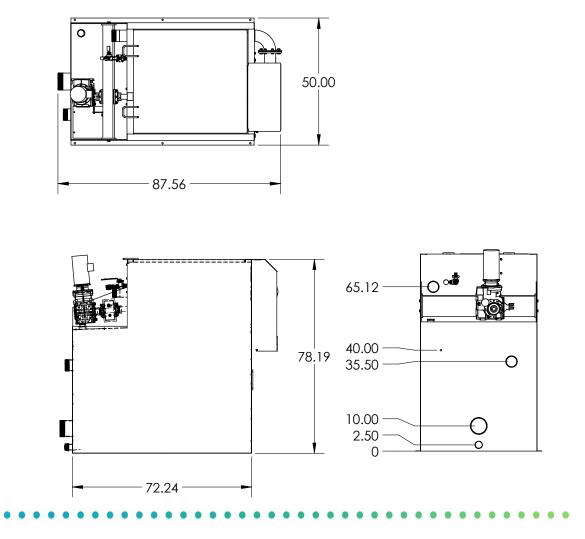



46.24

P: 800-881-5184

E: sales@innovatreat.com

Parts & Service General Inquiries

P: 800-881-5184

INNOVATREAT™ E: info@innovatreat.com

Innovative Treatment Products, Inc. NO
II Easter Court, Suite L
Owings Mills, MD 21117

www.innovatreat.com



